

变更标记	日期	变更内容	签名	核准

Material & finish

SHELL:

steel

Zinc plated, Tin plated

or Nickel plated steel

PIN CONTACT:

Phosphor bronze or brass

Gold Plated

INSULATOR:

PBT & Glass-fibre reinforced

UL-94-VO

NUT:

brass bar

NUMBER OF CONTACT:

09 15 25 37

CURRENT RATING:



3Amp

INSULATOR RESISTANCE:

1000Mn MIN.(at 500V DC)

TEMPERATURE:

-55°C to +105°C

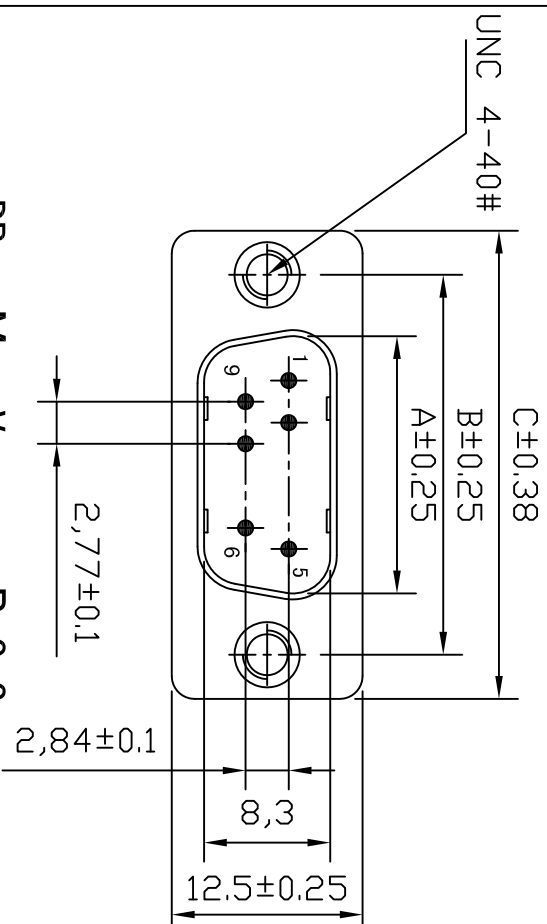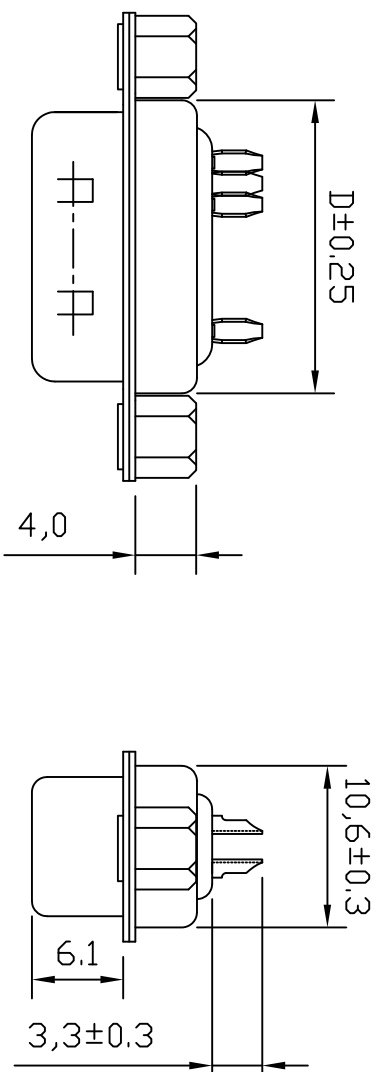

UNC 4-40#

DB-x M x V x x x B 0 0

Pin:09 15 25 37

COLOUR

B: Blue K: Black W: White 2: 661C
blue 3: 235C Red 4: 322C green
6: 131CYellow

SHELL PLATING

A: Gold B: Front Gold and back Tin C: Front Nickel and Back Tin N: Nickel T: Tin 5: Zinc D: Cu/Zn/SN

Contact Finish

A: Gold Flash C: Gold Flash3U" D: Gold Flash5U" E: Gold Flash15U"
F: Gold Flash30U" G: Gold T: Tin

	A	B	C	D
09	16.9	25.0	30.8	19.0
15	25.35	33.3	39.2	27.7
25	39.0	47.0	53.0	41.0
37	55.4	63.5	69.4	57.3

 东莞扬顺五金电子有限公司 Dong Guan City Yang Shun Hardware Electron Co.,Ltd			
未注公差	设计	品名规格	
X. ±0.30	审核	D-SUB一体公后聊4.0六角通孔螺母焊线式	
XX ±0.20	核准	料号	DB-xMxVxxxXB00
XXX ±0.10	单位	日期	图号
XXXX ±0.05	mm	2012-09-03	YS-11-0017
X° ±2° X.X° ±1°		比例	版次
		1:1	A/0